




Free Match

Ductless Multizone Heat Pump

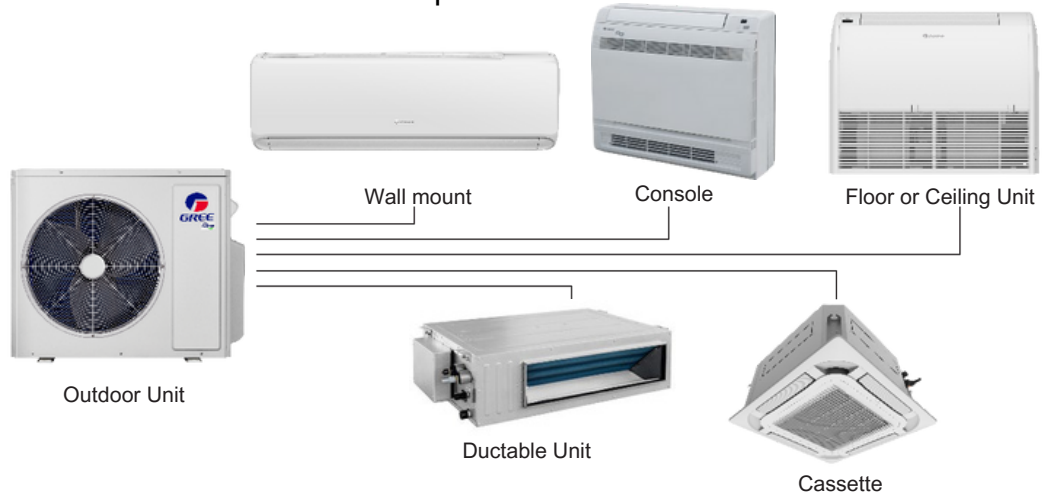

Performance up to:



Up to:



Features

Operation mode
Nominal capacity
Voltage

Outdoor unit

Indoor unit

Warranty

- Cooling, heating, dehumidifying, fan and auto. 18000, 24000, 30000, 36000, 42000
- BTU/hr.
- 208/230V, 60 Hz, 1-phase.
- Low voltage startup
- Automatic voltage adaptation
- Advanced G10 Inverter technology, with overload protection.
- Electronic expansion valve for precise control of refrigerant flow.
- Condenser fins covered with a hydrophilic coating for improved corrosion resistance.
- Large diameter quiet axial-flow fan for more efficient heat exchange.
- Smart pan heater to prevent ice formation.
- Compressor blanket and preheating technology.
- Up to 5 unique indoor options
- Indoor units powered by outdoor unit
- ***Please check your local and federal rebate programs.**
- ****10-year standard warranty, plus bonus 2-year extended warranty upon product registration with proof of installation.**

System features	<ul style="list-style-type: none"> - Self-diagnosis - Basepan with electric heater - Low Ambient Cooling down to -30°C (-22°F) - Set temperature range -30°C to 48°C (-20°F to 118°F) - Low Ambient Heating down to -30°C (-22°F) - Set temperature range -30°C to 24°C (-22°F to 75°F) - Temperature display format: °C or °F. - Indoor and Outdoor Blue Fin - 500 Hrs Salt Spray Tested - Power Factor Correction - Intelligent defrosting - Intelligent preheating - Memory and power failure recovery
Refrigerant	<ul style="list-style-type: none"> - New R32 Refrigerant - A2L leak detection sensor, included
Application	<ul style="list-style-type: none"> - Dining room-kitchen, living room, family room, commercial building, office building, condo, restaurant

Remote controller functions

- Auto clean
- Auto fan
- Auto swing (horizontal auto swing)
- Auto swing (vertical auto swing)
 - Available for wall mount unit, consoles and cassettes
- Dry anti-mildew (X-Fan) mode
- Dirty filter alert
- Fan speed control (7 speeds)
- I Feel function
- Child lock
- Quiet mode
- Room temperature display
- Timer mode
- Turbo mode



YBE1FB





XK76
(Wall controller optional)

Product #		GWHD(18)ND6MO	GWHD(24)ND6MO	GWHD(30)ND6MO	GWHD(36)ND6MO	GWHD(42)ND6MO	
Qty							
Technical Performance							
Number of connectable indoor unit		-	2	2 to 3	2 to 4	2 to 4	2 to 5
Voltage		Volts	208/230	208/230	208/230	208/230	208/230
Cooling capacity	Nominal	W (BTU/hr)	5275 (18000)	7030 (24000)	8300 (28400)	10550 (36000)	12310 (42000)
	Min. – max.	W (BTU/hr)	2140 – 5800 (7300 – 19800)	2200 – 9200 (7500 – 31400)	2400 – 10000 (8190 – 34100)	2600 – 12000 (8870 – 40900)	2600 – 13000 (8870 – 44300)
Heating capacity	Nominal	W (BTU/hr)	5275 (18000)	7030 (24000)	8800 (30000)	10550 (36000)	12310 (44300)
	Min. – max.	W (BTU/hr)	2140 – 5305 (7300 – 18100)	2200 – 9200 (7500 – 31400)	2400 – 12000 (8190 – 40900)	2600 – 15000 (8870 – 51180)	2600 – 16000 (8870 54590)
Used cooling power input	Nominal	W	1500	1850	2075	3000	3230
Used heating power input	Nominal	W	1350	1800	2100	2960	3150
MCA	A		14.5	19.5	23	30	30
Max. over-current protection (MOCP)	A		20	25	35	45	45
SEER2	-		21	21	21	21	21
HSPF2	-		10	10	10	10	10
EER2	BTU/hr		12.5	12	12.5	12	12
EER	W/W		3.52	3.8	4	3.52	3.81
COP	W/W		3.9	3.9	4.19	3.56	3.9
AHRI numbers	Non-Ducted		214931586	214931587	214931588	214931589	214931590
	Ducted		214931591	214931593	214931594	214931595	214931596
	Mixed		214931592	214931597	214931598	214931599	214931600
ENERGY STAR	-	✓	✓	✓	✓	✓	✓
Air flow volume	cfm		1354	2236	3413	3413	3413
Sound pressure level (High)	dB (A)		54	58	62	63	63
Compressor power input	W		1300	1887	2047	3514	3514
Compressor LRA	A		-	-	-	-	-
Compressor RLA	A		9.5	12	13.5	19.6	19.6
Fan motor power output	W		30	60	130	130	130
Refrigerant volume (R32)	oz (g)		31.8 (900)	60 (1700)	77.6 (2200)	95.3 (2700)	95.3 (2700)
Dimension L x H x D	in. (mm)		32 3/8 × 21 11/16 × 13 7/8 (822 × 550 × 352)	37 15/16 × 26 × 15 13/16 (964 × 660 × 402)	40 1/8 × 32 1/2 × 17 5/16 (1020 × 826 × 427)	40 1/8 × 32 1/2 × 17 5/16 (1020 × 826 × 427)	40 1/8 × 32 1/2 × 17 5/16 (1020 × 826 × 427)
Net weight	lb (kg)		78.3 (35.5)	112.5 (51)	145.5 (66)	173.1 (78.5)	174.2 (79)
Operating ambient temperature	Cooling	°C (°F)	-30 ~ 48 (-22 ~ 118)				
	Heating	°C (°F)	-30 ~ 24 (-22 ~ 75)				
Connection Piping/Refrigerant							
Pre-charge length	ft. (m)		33 (10)	98 (30)	131 (40)	131 (40)	164 (50)
Additional refrigerant charge	oz/ft. (g/m)		0.2 (20)	0.2 (20)	0.2 (20)	0.2 (20)	0.2 (20)
Liquid pipe outer diameter	in.		1/4	1/4	1/4	1/4	1/4
Gas pipe outer diameter	in.		3/8	3/8	3/8	3/8	3/8
Max. height difference outdoor to indoor unit	ft. (m)		49 (15)	49 (15)	82 (25)	82 (25)	82 (25)
Max. total length	ft. (m)		131 (40)	197 (60)	262 (80)	262 (80)	328 (100)


Clearance OUTDOOR UNIT

Minimum clearance

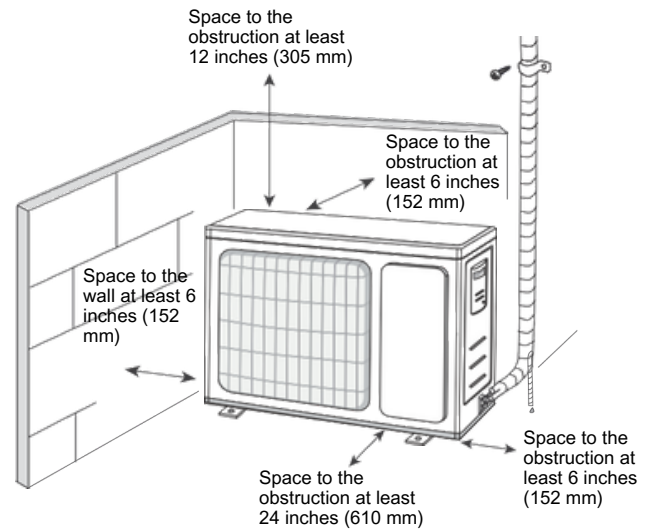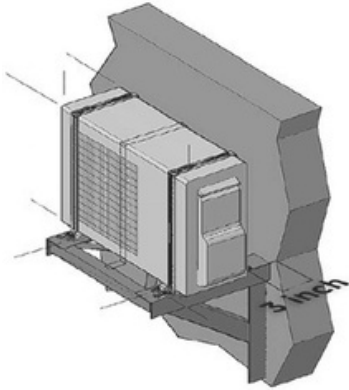

NOTE:
If bottom of the unit is free of airflow obstructions similar to the mounting bracket figure, the clearance to the wall on the back can be reduced to 3 inches. (76 mm)

Outdoor unit dimensions

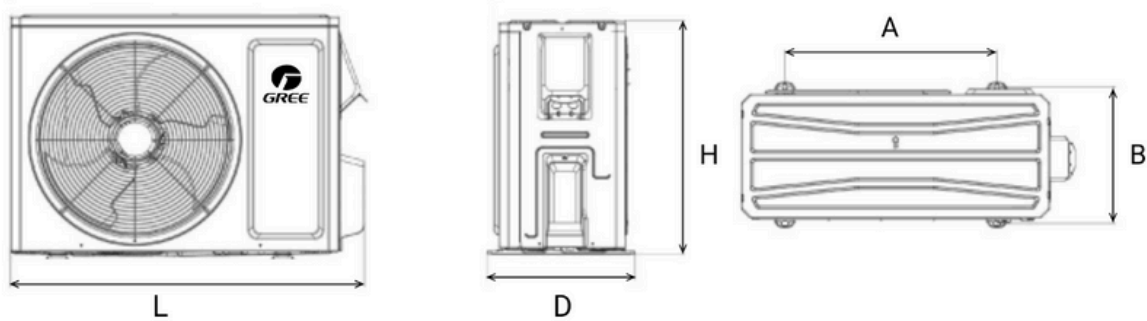


Outdoor Unit	L		H		D		A		B	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
GWHD(18)ND6MO	32 3/8	822	21 11/16	550	13 7/8	352	20 5/32	512	13 5/64	332
GWHD(24)ND6MO	37 15/16	964	26	660	15 13/16	402	22 7/16	570	14 5/8	371
GWHD(30)ND6MO GWHD(36)ND6MO GWHD(42)ND6MO	40 1/8	1020	32 1/2	826	17 5/16	427	25	660	15 5/8	396

Wall mount unit (Charmo R32 indoor unit)

Product #		GWH09ATCXB-D6DNA4D/I	GWH12ATCXB-D6DNA4B/I	GWH18ATDXD-D6DNA4F/I	GWH24ATEXF-D6DNA4H/I	
Qty						
Cooling capacity	Nominal	W (BTU/hr)	2667 (9100)	3517 (12000)	5275 (18000)	7034 (24000)
	Min. – max.	W (BTU/hr)	700 - 3500 (2388 - 10300)	900 - 3900 (3070 - 13300)	1100 - 5950 (3753 - 20300)	1700 - 7700 (5800 - 26270)
Heating capacity	Nominal	W (BTU/hr)	2931 (10000)	3517 (12000)	5600 (19100)	7034 (24000)
	Min. – max.	W (BTU/hr)	650 – 3517 (2217- 12000)	900 - 3546 (3070 - 12100)	800 - 6600 (2730 - 22500)	1600 - 7034 (5400 - 24000)
Dehumidification		pt/hr (l/hr)	1.69 (0.80)	2.96 (1.4)	3.80 (1.8)	5.28 (2.5)
Air flow volume		cfm	353 / 282 / 265 / 230 / 212 / 194 / 159	424 / 353 / 324 / 277 / 247 / 224 / 182	618 / 512 / 471 / 435 / 394 / 335 / 282	677 / 589 / 559 / 500 / 471 / 441 / 412
Sound level (H/M/L)		dB (A)	47 / 42 / 37	49 / 45 / 42	59 / 54 / 48	57 / 51 / 48
Fan motor power output		W	20	55	50	50
Fan motor RLA		A	0.4	0.7	0.7	0.6
Deflector stepper motor power output		W	1.5	1.5	1.5	1.5
Dimension L x H x D		in. (mm)	32 7/8 x 10 13/16 x 7 7/8 (835 x 275 x 200)	32 7/8 x 10 13/16 x 7 7/8 (835 x 275 x 200)	37 1/8 x 13 1/8 x 9 11/16 (943 x 333 x 246)	42 7/16 x 13 1/8 x 9 11/16 (1078 x 333 x 246)
Net weight		lb (kg)	19.8 (9)	19.8 (9)	28.7 (13)	33.1 (15)
Liquid pipe outer diameter		in.	1/4	1/4	1/4	1/4
Gas pipe outer diameter		in.	3/8	3/8	1/2	1/2

Wall mount unit dimensions

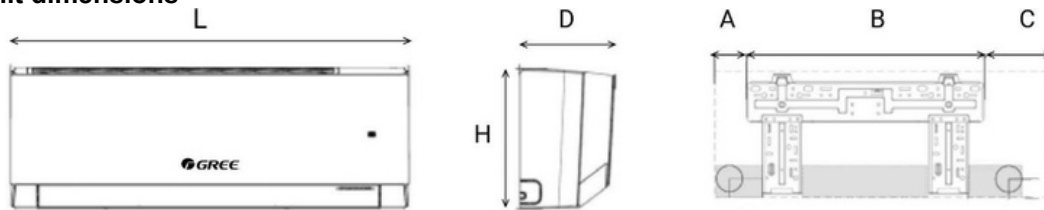

Wall Mount Unit	L		H		D		A		B		C	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
GWH09ATCXB-D6DNA4D/I GWH12ATCXB-D6DNA4B/I	32 7/8	835	10 53/64	275	7 7/8	200	7	178	18 3/16	462	7 43/64	195
GWH18ATDXD-D6DNA4F/I	37 8/64	943	13 7/64	333	9 11/16	246	7 9/16	192	22 1/8	562	7 31/64	190
GWH24ATEXF-D6DNA4H/I	42 7/16	1078	13 7/64	333	9 11/16	246	6 7/32	158	22 1/8	562	10 5/32	258

Console

Product #			GEH(09)AA-D6DNA1A/I	GEH(12)AA-D6DNA1A/I	GEH(18)AA-D6DNA1A/I
Qty					
Cooling capacity	Nominal	W (BTU/hr)	2670 (9100)	3520 (12000)	5270 (18000)
Heating capacity	Nominal	W (BTU/hr)	3080 (10500)	3520 (12000)	5270 (18000)
Dehumidification		pt/hr (l/hr)	1.69 (0.8)	2.96 (1.40)	3.80 (1.8)
Air flow volume	Min. - max.	cfm	188 / 383	206 / 441	241 / 494
Sound level	Min. - max.	dB (A)	36 / 52	39 / 55	42 / 57
Dimension L x H x D		in. (mm)	27 5/8 x 23 5/8 x 8 1/2 (700 x 600 x 215)	27 5/8 x 23 5/8 x 8 1/2 (700 x 600 x 215)	27 5/8 x 23 5/8 x 8 1/2 (700 x 600 x 215)
Net weight		lb (kg)	33 (16)	33 (16)	33 (16)
Liquid pipe outer diameter		in.	1/4	1/4	1/4
Gas pipe outer diameter		in.	3/8	3/8	1/2

Floor or Ceiling Unit

Product #			GTH(09)CA-D6DNA1B/I	GTH(12)CA-D6DNA1B/I	GTH(18)CA-D6DNA1B/I	GTH(24)CB-D6DNA1B/I
Qty						
Cooling capacity	Nominal	W (BTU/hr)	2670 (9100)	3520 (12000)	5270 (18000)	6450 (22000)
Heating capacity	Nominal	W (BTU/hr)	3080 (10500)	3520 (12000)	5270 (18000)	7030 (24000)
Dehumidification		pt/hr (l/hr)	1.69 (0.8)	2.96 (1.40)	3.80 (1.80)	4 (2)
Air flow volume	Min. - max.	cfm	182 / 383	247 / 412	383 / 530	441 / 706
Sound level	Min. - max.	dB (A)	36 / 43	39 / 49	46 / 58	48 / 61
Dimension L x H x D		in. (mm)	34 1/4 x 26 1/8 x 9 1/4 (870 x 665 x 235)	34 1/4 x 26 1/8 x 9 1/4 (870 x 665 x 235)	34 1/4 x 26 1/8 x 9 1/4 (870 x 665 x 235)	34 1/4 x 26 1/8 x 9 1/4 (870 x 665 x 235)
Net weight		lb (kg)	55 (25)	55 (25)	56 (26)	73 (33)
Liquid pipe outer diameter		in.	1/4	1/4	1/4	1/4
Gas pipe outer diameter		in.	3/8	3/8	1/2	5/8

Ductable Unit

Product #			GFH(09)DA-D6DNA1A/I	GFH(12)DA-D6DNA1A/I	GFH(18)DB-D6DNA1A/I	GFH(21)DB-D6DNA1A/I	GFH(24)DB-D6DNA1A/I
Qty							
Cooling capacity	Nominal	W (BTU/hr)	2640 (9100)	3520 (12000)	5275 (18000)	6480 (22000)	6480 (22000)
Heating capacity	Nominal	W (BTU/hr)	3078 (10500)	3520 (12000)	5275 (18000)	7040 (24000)	7040 (24000)
Dehumidification		pt/hr (l/hr)	1.69 (0.8)	2.96 (1.4)	3.8 (1.8)	4.23 (2)	5.28 (2.5)
Air flow volume	Min. - max.	cfm	188 / 324	212 / 353	288 / 589	288 / 589	406 / 736
Sound level	Min. - max.	dB (A)	35 / 48	35 / 49	35 / 50	35 / 51	40 / 52
ESP		InWg	0.24 / 0.6	0.24 / 0.6	0.36 / 0.8	0.36 / 0.8	0.36 / 0.8
Dimension L x H x D		in. (mm)	32 2/3 x 113/4 x 29 2/3 (830 x 300 x 754)	32 2/3 x 113/4 x 29 2/3 (830 x 300 x 754)	44 1/2 x 11 3/4 x 29 2/3 (1130 x 300 x 754)	44 1/2 x 11 3/4 x 29 2/3 (1130 x 300 x 754)	44 1/2 x 11 3/4 x 29 2/3 (1130 x 300 x 754)
Net weight		lb (kg)	71 (32)	71 (32)	93 (42)	93 (42)	93 (42)
Liquid pipe outer diameter		in.	1/4	1/4	1/4	1/4	1/4
Gas pipe outer diameter		in.	3/8	3/8	5/8	5/8	5/8

Cassette

Product #			GKH(09)EB-D6DNA1A/I	GKH(12)EB-D6DNA1A/I	GKH(18)EB-D6DNA1A/I	GKH(24)EC-D6DNA1A/I
Qty						
Cooling capacity	Nominal	W (BTU/hr)	2680 (9100)	3520 (12000)	5270 (18000)	6450 (22000)
Heating capacity	Nominal	W (BTU/hr)	3080 (10500)	3520 (12000)	5270 (18000)	7030 (24000)
Dehumidification		pt/hr (l/hr)	2.96 (1.40)	2.96 (1.40)	3.80 (1.80)	5.28 (2.50)
Air flow volume	Min. - max.	cfm	206 / 330	206 / 330	206 / 383	471 / 647
Sound level	Min. - max.	dB (A)	39 / 50	39 / 50	40 / 54	49 / 55
Unit dimension L x H x D		in. (mm)	22 1/2 x 10 3/8 x 22 1/2 (570 x 265 x 570)	22 1/2 x 10 3/8 x 22 1/2 (570 x 265 x 570)	22 1/2 x 10 3/8 x 22 1/2 (570 x 265 x 570)	33 1/8 x 9 7/16 x 33 1/8 (840 x 240 840)
Grille dimension L x H x D		in. (mm)	24 3/8 x 1 7/8 x 24 3/8 (620 x 47.5 x 620)	24 3/8 x 1 7/8 x 24 3/8 (620 x 47.5 x 620)	24 3/8 x 1 7/8 x 24 3/8 (620 x 47.5 x 620)	37 3/8 x 2 1/16 x 37 3/8 (950 x 52 x 950)
Net weight		lb (kg)	37 (17)	37 (17)	37 (17)	64 (29)
Liquid pipe outer diameter		in.	1/4	1/4	1/4	1/4
Gas pipe outer diameter		in.	3/8	3/8	1/2	5/8

Note that each unit is individually packaged.

Multizone compatibility chart

Wall mount options

	Multizone				
	GWHD(18)ND6MO	GWHD(24)ND6MO	GWHD(30)ND6MO	GWHD(36)ND6MO	GWHD(42)ND6MO
Charmo R32					
SystemModelNo.					
GWH09ATCXB-D6DNA4D/I	•	•	•	•	•
GWH12ATCXB-D6DNA4B/I	•	•	•	•	•
GWH18ATDXD-D6DNA4F/I		•	•	•	•
GWH24ATEXF-D6DNA4H/I			•	•	•
GWH30ATEXH-D6DNA1G/I					
GWH36ATEXH-D6DNA1G/I					
Clivia R32					
SystemModel no.					
GWH09AGCXD-D6DNA4D/I	•	•	•	•	•
GWH12AGCXD-D6DNA4D/I	•	•	•	•	•
GWH18AGDXF-D6DNA4B/I		•	•	•	•
GWH24AGEXF-D6DNA4J/I			•	•	•
Airy R32					
SystemModel no.					
GWH09AVDXE-D6DNA1B/I	•	•	•	•	•
GWH12AVDXE-D6DNA1B/I	•	•	•	•	•
GWH18AVEXF-D6DNA1B/I		•	•	•	•
GWH24AVEXH-D6DNA1B/I			•	•	•

Additional indoor unit options

	Multizone				
	GWHD(18)ND6MO	GWHD(24)ND6MO	GWHD(30)ND6MO	GWHD(36)ND6MO	GWHD(42)ND6MO
One way cassette					
SystemModelNo.					
GKH(09)DA-D6DNA1B/I	•	•	•	•	•
GKH(12)DA-D6DNA1B/I	•	•	•	•	•
GKH(18)DA-D6DNA1B/I		•	•	•	•
GKH(20)DA-D6DNA1B/I			•	•	•
Ceiling cassette					
SystemModelNo.					
GKH(09)EB-D6DNA1A/I	•	•	•	•	•
GKH(12)EB-D6DNA1A/I	•	•	•	•	•
GKH(18)EB-D6DNA1A/I		•	•	•	•
GKH(24)EC-D6DNA1A/I			•	•	•
Slim duct					
SystemModel no.					
GFH(09)DA-D3DNA1A/I	•	•	•	•	•
GFH(12)DA-D3DNA1A/I	•	•	•	•	•
GFH(18)DB-D3DNA1A/I		•	•	•	•
GFH(21)DB-D3DNA1A/I			•	•	•
Floor/ceiling					
SystemModelNo.					
GTH(09)CA-D6DNA1B/I	•	•	•	•	•
GTH(12)CA-D6DNA1B/I	•	•	•	•	•
GTH(18)CA-D6DNA1B/I		•	•	•	•
GTH(24)CB-D6DNA1B/I			•	•	•
Mini-console					
SystemModelNo.					
GEH(09)AA-D6DNA1A/I	•	•	•	•	•
GEH(12)AA-D6DNA1A/I	•	•	•	•	•
GEH(18)AA-D6DNA1A/I		•	•	•	•

NOTE: R32 Indoor units are only compatible with R32 Outdoor units. Keep in mind, line set is always sized by the indoor unit valve diameter.

Allowable combinations capacities

GWHD(18)ND6MO

Model Number	Possible Combonations	Cooling Capacity (Btu/h)					Heating Capacity (Btu/h)				
		Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
GWHD(18)ND6MO	5K+5K	5 000	5 000				6 000	6 000			
GWHD(18)ND6MO	7K+7K	7 000	7 000				8 000	8 000			
GWHD(18)ND6MO	5K+7K	5 000	7 000				6 000	8 000			
GWHD(18)ND6MO	9K+9K	9 000	9 000				9 000	9 000			
GWHD(18)ND6MO	9K+12K	7 714	10 286				7 714	10 286			
GWHD(18)ND6MO	12K+12K	9 000	9 000				9 000	9 000			

Outdoor Unit & Possible Indoor Unit Combinations with AHRI Certified Performance

*You may substitute the 9K unit with a 5K or 7K High Wall unit, find complete capacity information in the extended ratings chart.

GWHD(24)ND6MO

Model Number	Possible Combonations	Cooling Capacity (Btu/h)					Heating Capacity (Btu/h)				
		Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
GWHD(24)ND6MO	5K+7K	5 000	7 000				6 000	8 000			
GWHD(24)ND6MO	7K+7K	7 000	7 000				8 000	8 000			
GWHD(24)ND6MO	5K+5K+5K	5 000	5 000	5 000			6 000	6 000	6 000		
GWHD(24)ND6MO	7K+7K+7K	7 000	7 000	7 000			8 000	8 000	8 000		
GWHD(24)ND6MO	5K+5K+7K	5 000	5 000	6 000			6 000	6 000	8 000		
GWHD(24)ND6MO	5K+7K+7K	5 000	7 000	7 000			6 000	8 000	8 000		
GWHD(24)ND6MO	9K+9K	9 000	9 000				9 000	9 000			
GWHD(24)ND6MO	9K+12K	9 000	12 000				9 000	12 000			
GWHD(24)ND6MO	9K+18K	8 000	16 000				8 000	16 000			
GWHD(24)ND6MO	12K+12K	12 000	12 000				12 000	12 000			
GWHD(24)ND6MO	12K+18K	9 600	14 400				9 600	14 400			
GWHD(24)ND6MO	18K+18K	12 000	12 000				12 000	12 000			
GWHD(24)ND6MO	9K+9K+9K	8 000	8 000	8 000			8 000	8 000	8 000		
GWHD(24)ND6MO	9K+9K+12K	7 200	7 200	9 600			7 200	7 200	9 600		
GWHD(24)ND6MO	9K+9K+18K	6 000	6 000	12 000			6 000	6 000	12 000		
GWHD(24)ND6MO	9K+12K+12K	6 545	8 727	8 727			6 545	8 727	8 727		
GWHD(24)ND6MO	12K+12K+12K	8 000	8 000	8 000			8 000	8 000	8 000		

Outdoor Unit & Possible Indoor Unit Combinations with AHRI Certified Performance

*You may substitute the 9K unit with a 5K or 7K High Wall unit, find complete capacity information in the extended ratings chart.

GWHD(30)ND6MO

Model Number	Possible Combonations	Cooling Capacity (Btu/h)					Heating Capacity (Btu/h)				
		Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
GWHD(30)ND6MO	5K+5K+5K	5 000	5 000	5 000			6 000	6 000	6 000		
GWHD(30)ND6MO	7K+7K+7K	7 000	7 000	7 000			8 000	8 000	8 000		
GWHD(30)ND6MO	5K+5K+7K	5 000	5 000	6 000			6 000	6 000	8 000		
GWHD(30)ND6MO	5K+7K+7K	5 000	7 000	7 000			6 000	8 000	8 000		
GWHD(30)ND6MO	5K+5K+5K+5K	5 000	5 000	5 000	5 000		6 000	6 000	6 000	6 000	
GWHD(30)ND6MO	7K+7K+7K+7K	7 000	7 000	7 000	7 000		8 000	8 000	8 000	8 000	
GWHD(30)ND6MO	5K+5K+5K+7K	5 000	5 000	5 000	7 000		6 000	6 000	6 000	8 000	
GWHD(30)ND6MO	5K+5K+7K+7K	5 000	5 000	7 000	7 000		6 000	6 000	8 000	8 000	
GWHD(30)ND6MO	5K+7K+7K+7K	5 000	7 000	7 000	7 000		6 000	8 000	8 000	8 000	
GWHD(30)ND6MO	9K+9K	9 000	9 000				9 000	9 000			
GWHD(30)ND6MO	9K+12K	9 000	12 000				9 000	12 000			
GWHD(30)ND6MO	9K+18K	9 000	18 000				9 000	18 000			
GWHD(30)ND6MO	9K+24K	7 745	20 655				8 182	21 818			
GWHD(30)ND6MO	12K+12K	12 000	12 000				12 000	12 000			
GWHD(30)ND6MO	12K+18K	11 360	17 040				12 000	18 000			
GWHD(30)ND6MO	12K+24K	9 467	18 933				10 000	20 000			
GWHD(30)ND6MO	18K+18K	14 200	14 200				15 000	15 000			
GWHD(30)ND6MO	18K+24K	12 171	16 229				12 857	17 143			
GWHD(30)ND6MO	9K+9K+9K	9 000	9 000	9 000			9 000	9 000	9 000		
GWHD(30)ND6MO	9K+9K+12K	8 520	8 520	11 360			9 000	9 000	12 000		
GWHD(30)ND6MO	9K+9K+18K	7 100	7 100	14 200			7 500	7 500	15 000		
GWHD(30)ND6MO	9K+9K+24K	6 086	6 086	16 229			6 429	6 429	17 143		
GWHD(30)ND6MO	9K+12K+12K	7 745	10 327	10 327			8 182	10 909	10 909		
GWHD(30)ND6MO	9K+12K+18K	6 554	8 738	13 108			6 923	9 231	13 846		
GWHD(30)ND6MO	9K+12K+24K	5 680	7 573	15 147			6 000	8 000	16 000		
GWHD(30)ND6MO	9K+18K+18K	5 680	11 360	11 360			6 000	12 000	12 000		
GWHD(30)ND6MO	12K+12K+12K	9 467	9 467	9 467			10 000	10 000	10 000		
GWHD(30)ND6MO	12K+12K+18K	8 114	8 114	12 171			8 571	8 571	12 857		
GWHD(30)ND6MO	9K+9K+9K+9K	7 100	7 100	7 100	7 100		7 500	7 500	7 500	7 500	
GWHD(30)ND6MO	9K+9K+9K+12K	6 554	6 554	6 554	8 738		6 923	6 923	6 923	9 231	
GWHD(30)ND6MO	9K+9K+9K+18K	5 680	5 680	5 680	11 360		6 000	6 000	6 000	12 000	
GWHD(30)ND6MO	9K+9K+12K+12K	6 086	6 086	8 114	8 114		6 429	6 429	8 571	8 571	
GWHD(30)ND6MO	9K+12K+12K+12K	5 680	7 573	7 573	7 573		6 000	8 000	8 000	8 000	

Outdoor Unit & Possible Indoor Unit Combinations with AHRI Certified Performance

*You may substitute the 9K unit with a 5K or 7K High Wall unit, find complete capacity information in the extended ratings chart.

GWHD(36)ND6MO

Model Number	Possible Combinations	Cooling Capacity (Btu/h)					Heating Capacity (Btu/h)				
		Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
GWHD(36)ND6MO	7K+7K+7K	7 000	7 000	7 000			8 000	8 000	8 000		
GWHD(36)ND6MO	5K+7K+7K	5 000	7 000	7 000			6 000	8 000	8 000		
GWHD(36)ND6MO	5K+5K+5K+5K	5 000	5 000	5 000	5 000		6 000	6 000	6 000	6 000	
GWHD(36)ND6MO	7K+7K+7K+7K	7 000	7 000	7 000	7 000		8 000	8 000	8 000	8 000	
GWHD(36)ND6MO	5K+5K+5K+7K	5 000	5 000	5 000	7 000		6 000	6 000	6 000	8 000	
GWHD(36)ND6MO	5K+5K+7K+7K	5 000	5 000	7 000	7 000		6 000	6 000	8 000	8 000	
GWHD(36)ND6MO	5K+7K+7K+7K	5 000	7 000	7 000	7 000		6 000	8 000	8 000	8 000	
GWHD(36)ND6MO	9K+9K	9 000	9 000				9 000	9 000			
GWHD(36)ND6MO	9K+12K	9 000	12 000				9 000	12 000			
GWHD(36)ND6MO	9K+18K	9 000	18 000				9 000	18 000			
GWHD(36)ND6MO	9K+24K	9 000	24 000				9 000	24 000			
GWHD(36)ND6MO	12K+12K	12 000	12 000				12 000	12 000			
GWHD(36)ND6MO	12K+18K	12 000	18 000				12 000	18 000			
GWHD(36)ND6MO	12K+24K	12 000	24 000				12 000	24 000			
GWHD(36)ND6MO	18K+18K	18 000	18 000				18 000	18 000			
GWHD(36)ND6MO	18K+24K	15 429	20 571				15 429	20 571			
GWHD(36)ND6MO	21K+24K	16 800	19 200				16 800	19 200			
GWHD(36)ND6MO	24K+24K	18 000	18 000				18 000	18 000			
GWHD(36)ND6MO	9K+9K+9K	9 000	9 000	9 000			9 000	9 000	9 000		
GWHD(36)ND6MO	9K+9K+12K	9 000	9 000	12 000			9 000	9 000	12 000		
GWHD(36)ND6MO	9K+9K+18K	9 000	9 000	18 000			9 000	9 000	18 000		
GWHD(36)ND6MO	9K+9K+24K	7 714	7 714	20 571			7 714	7 714	20 571		
GWHD(36)ND6MO	9K+12K+12K	9 000	12 000	12 000			9 000	12 000	12 000		
GWHD(36)ND6MO	9K+12K+18K	8 308	11 077	16 615			8 308	11 077	16 615		
GWHD(36)ND6MO	9K+12K+24K	7 200	9 600	19 200			7 200	9 600	19 200		
GWHD(36)ND6MO	9K+18K+18K	7 200	14 400	14 400			7 200	14 400	14 400		
GWHD(36)ND6MO	9K+18K+24K	6 353	12 706	16 941			6 353	12 706	16 941		
GWHD(36)ND6MO	9K+21K+24K	6 000	14 000	16 000			6 000	14 000	16 000		
GWHD(36)ND6MO	12K+12K+12K	12 000	12 000	12 000			12 000	12 000	12 000		
GWHD(36)ND6MO	12K+12K+18K	10 286	10 286	15 429			10 286	10 286	15 429		
GWHD(36)ND6MO	12K+12K+24K	9 000	9 000	18 000			9 000	9 000	18 000		
GWHD(36)ND6MO	12K+18K+18K	9 000	13 500	13 500			9 000	13 500	13 500		
GWHD(36)ND6MO	12K+18K+24K	8 000	12 000	16 000			8 000	12 000	16 000		
GWHD(36)ND6MO	18K+18K+18K	12 000	12 000	12 000			12 000	12 000	12 000		
GWHD(36)ND6MO	9K+9K+9K+9K	9 000	9 000	9 000	9 000		9 000	9 000	9 000	9 000	
GWHD(36)ND6MO	9K+9K+9K+12K	8 308	8 308	8 308	11 077		8 308	8 308	8 308	11 077	
GWHD(36)ND6MO	9K+9K+9K+18K	7 200	7 200	7 200	14 400		7 200	7 200	7 200	14 400	
GWHD(36)ND6MO	9K+9K+9K+24K	6 353	6 353	6 353	16 941		6 353	6 353	6 353	16 941	
GWHD(36)ND6MO	9K+9K+12K+12K	7 714	7 714	10 286	10 286		7 714	7 714	10 286	10 286	
GWHD(36)ND6MO	9K+9K+12K+18K	6 750	6 750	9 000	13 500		6 750	6 750	9 000	13 500	

GWHD(36)ND6MO (Continued)

GWHD(36)ND6MO	9K+9K+12K+24K	6 000	6 000	8 000	16 000		6 000	6 000	8 000	16 000	
GWHD(36)ND6MO	9K+9K+18K+18K	6 000	6 000	12 000	12 000		6 000	6 000	12 000	12 000	
GWHD(36)ND6MO	9K+12K+12K+12K	7 200	9 600	9 600	9 600		7 200	9 600	9 600	9 600	
GWHD(36)ND6MO	9K+12K+12K+18K	6 353	8 471	8 471	12 706		6 353	8 471	8 471	12 706	
GWHD(36)ND6MO	12K+12K+12K+12K	9 000	9 000	9 000	9 000		9 000	9 000	9 000	9 000	
GWHD(36)ND6MO	12K+12K+12K+18K	8 000	8 000	8 000	12 000		8 000	8 000	8 000	12 000	

Outdoor Unit & Possible Indoor Unit Combinations with AHRI Certified Performance

*You may substitute the 9K unit with a 5K or 7K High Wall unit, find complete capacity information in the extended ratings chart.

GWHD(42)ND6MO

Model Number	Possible Combonations	Cooling Capacity (Btu/h)					Heating Capacity (Btu/h)				
		Zone 1	Zone 2	Zone 3	Zone 4	Zone 5	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
GWHD(42)ND6MO	7K+7K+7K	7 000	7 000	7 000			8 000	8 000	8 000		
GWHD(42)ND6MO	7K+7K+7K+7K	7 000	7 000	7 000	7 000		8 000	8 000	8 000	8 000	
GWHD(42)ND6MO	5K+5K+5K+7K	5 000	5 000	5 000	7 000		6 000	6 000	6 000	8 000	
GWHD(42)ND6MO	5K+5K+7K+7K	5 000	5 000	7 000	7 000		6 000	6 000	8 000	8 000	
GWHD(42)ND6MO	5K+7K+7K+7K	5 000	7 000	7 000	7 000		6 000	8 000	8 000	8 000	
GWHD(42)ND6MO	5K+5K+5K+5K+5K	5 000	5 000	5 000	5 000	5 000	6 000	6 000	6 000	6 000	6 000
GWHD(42)ND6MO	7K+7K+7K+7K+7K	7 000	7 000	7 000	7 000	7 000	8 000	8 000	8 000	8 000	8 000
GWHD(42)ND6MO	5K+5K+5K+5K+7K	5 000	5 000	5 000	5 000	7 000	6 000	6 000	6 000	6 000	8 000
GWHD(42)ND6MO	5K+5K+5K+7K+7K	5 000	5 000	5 000	7 000	7 000	6 000	6 000	6 000	8 000	8 000
GWHD(42)ND6MO	5K+5K+7K+7K+7K	5 000	5 000	7 000	7 000	7 000	6 000	6 000	8 000	8 000	8 000
GWHD(42)ND6MO	5K+7K+7K+7K+7K	5 000	7 000	7 000	7 000	7 000	6 000	8 000	8 000	8 000	8 000
GWHD(42)ND6MO	9K+12K	9 000	12 000				9 000	12 000			
GWHD(42)ND6MO	9K+18K	9 000	18 000				9 000	18 000			
GWHD(42)ND6MO	9K+24K	9 000	24 000				9 000	24 000			
GWHD(42)ND6MO	12K+12K	12 000	12 000				12 000	12 000			
GWHD(42)ND6MO	12K+18K	12 000	18 000				12 000	18 000			
GWHD(42)ND6MO	12K+24K	12 000	24 000				12 000	24 000			
GWHD(42)ND6MO	18K+18K	18 000	18 000				18 000	18 000			
GWHD(42)ND6MO	18K+24K	18 000	24 000				18 000	24 000			
GWHD(42)ND6MO	24K+24K	21 000	21 000				21 000	21 000			
GWHD(42)ND6MO	9K+9K+9K	9 000	9 000	9 000			9 000	9 000	9 000		
GWHD(42)ND6MO	9K+9K+12K	9 000	9 000	12 000			9 000	9 000	12 000		
GWHD(42)ND6MO	9K+9K+18K	9 000	9 000	18 000			9 000	9 000	18 000		
GWHD(42)ND6MO	9K+9K+24K	9 000	9 000	24 000			9 000	9 000	24 000		
GWHD(42)ND6MO	9K+12K+12K	9 000	12 000	12 000			9 000	12 000	12 000		
GWHD(42)ND6MO	9K+12K+18K	9 000	12 000	18 000			9 000	12 000	18 000		
GWHD(42)ND6MO	9K+12K+24K	8 400	11 200	22 400			8 400	11 200	22 400		
GWHD(42)ND6MO	9K+18K+18K	8 400	16 800	16 800			8 400	16 800	16 800		
GWHD(42)ND6MO	9K+18K+24K	7 412	14 824	19 765			7 412	14 824	19 765		
GWHD(42)ND6MO	9K+24K+24K	6 632	17 684	17 684			6 632	17 684	17 684		
GWHD(42)ND6MO	12K+12K+12K	12 000	12 000	12 000			12 000	12 000	12 000		
GWHD(42)ND6MO	12K+12K+18K	12 000	12 000	18 000			12 000	12 000	18 000		
GWHD(42)ND6MO	12K+12K+24K	10 500	10 500	21 000			10 500	10 500	21 000		
GWHD(42)ND6MO	12K+18K+18K	10 500	15 750	15 750			10 500	15 750	15 750		
GWHD(42)ND6MO	12K+18K+24K	9 333	14 000	18 667			9 333	14 000	18 667		
GWHD(42)ND6MO	12K+24K+24K	8 400	16 800	16 800			8 400	16 800	16 800		
GWHD(42)ND6MO	18K+18K+18K	14 000	14 000	14 000			14 000	14 000	14 000		
GWHD(42)ND6MO	18K+18K+24K	12 600	12 600	16 800			12 600	12 600	16 800		
GWHD(42)ND6MO	9K+9K+9K+9K	9 000	9 000	9 000	9 000		9 000	9 000	9 000	9 000	
GWHD(42)ND6MO	9K+9K+9K+12K	9 000	9 000	9 000	12 000		9 000	9 000	9 000	12 000	

GWHD(42)ND6MO (continued)

GWHD(42)ND6MO	9K+9K+9K+18K	8 400	8 400	8 400	16 800		8 400	8 400	8 400	16 800	
GWHD(42)ND6MO	9K+9K+9K+24K	7 412	7 412	7 412	19 765		7 412	7 412	7 412	19 765	
GWHD(42)ND6MO	9K+9K+12K+12K	9 000	9 000	12 000	12 000		9 000	9 000	12 000	12 000	
GWHD(42)ND6MO	9K+9K+12K+18K	7 875	7 875	10 500	15 750		7 875	7 875	10 500	15 750	
GWHD(42)ND6MO	9K+9K+12K+24K	7 000	7 000	9 333	18 667		7 000	7 000	9 333	18 667	
GWHD(42)ND6MO	9K+9K+18K+18K	7 000	7 000	14 000	14 000		7 000	7 000	14 000	14 000	
GWHD(42)ND6MO	9K+9K+18K+24K	6 300	6 300	12 600	16 800		6 300	6 300	12 600	16 800	
GWHD(42)ND6MO	9K+12K+12K+12K	8 400	11 200	11 200	11 200		8 400	11 200	11 200	11 200	
GWHD(42)ND6MO	9K+12K+12K+18K	7 412	9 882	9 882	14 824		7 412	9 882	9 882	14 824	
GWHD(42)ND6MO	9K+12K+12K+24K	6 632	8 842	8 842	17 684		6 632	8 842	8 842	17 684	
GWHD(42)ND6MO	9K+12K+18K+18K	6 632	8 842	13 263	13 263		6 632	8 842	13 263	13 263	
GWHD(42)ND6MO	9K+12K+18K+24K	6 000	8 000	12 000	16 000		6 000	8 000	12 000	16 000	
GWHD(42)ND6MO	9K+18K+18K+18K	6 000	12 000	12 000	12 000		6 000	12 000	12 000	12 000	
GWHD(42)ND6MO	12K+12K+12K+12K	10 500	10 500	10 500	10 500		10 500	10 500	10 500	10 500	
GWHD(42)ND6MO	12K+12K+12K+18K	9 333	9 333	9 333	14 000		9 333	9 333	9 333	14 000	
GWHD(42)ND6MO	12K+12K+12K+24K	8 400	8 400	8 400	16 800		8 400	8 400	8 400	16 800	
GWHD(42)ND6MO	12K+12K+18K+18K	8 400	8 400	12 600	12 600		8 400	8 400	12 600	12 600	
GWHD(42)ND6MO	9K+9K+9K+9K+9K	8 400	8 400	8 400	8 400	8 400	8 400	8 400	8 400	8 400	8 400
GWHD(42)ND6MO	9K+9K+9K+9K+12K	7 875	7 875	7 875	7 875	10 500	7 875	7 875	7 875	7 875	10 500
GWHD(42)ND6MO	9K+9K+9K+9K+18K	7 000	7 000	7 000	7 000	14 000	7 000	7 000	7 000	7 000	14 000
GWHD(42)ND6MO	9K+9K+9K+9K+24K	6 300	6 300	6 300	6 300	16 800	6 300	6 300	6 300	6 300	16 800
GWHD(42)ND6MO	9K+9K+9K+12K+12K	7 412	7 412	7 412	9 882	9 882	7 412	7 412	7 412	9 882	9 882
GWHD(42)ND6MO	9K+9K+9K+12K+18K	6 632	6 632	6 632	8 842	13 263	6 632	6 632	6 632	8 842	13 263
GWHD(42)ND6MO	9K+9K+9K+12K+24K	6 000	6 000	6 000	8 000	16 000	6 000	6 000	6 000	8 000	16 000
GWHD(42)ND6MO	9K+9K+9K+18K+18K	6 000	6 000	6 000	12 000	12 000	6 000	6 000	6 000	12 000	12 000
GWHD(42)ND6MO	9K+9K+12K+12K+12K	7 000	7 000	9 333	9 333	9 333	7 000	7 000	9 333	9 333	9 333
GWHD(42)ND6MO	9K+9K+12K+12K+18K	6 300	6 300	8 400	8 400	12 600	6 300	6 300	8 400	8 400	12 600
GWHD(42)ND6MO	9K+12K+12K+12K+12K	6 632	8 842	8 842	8 842	8 842	6 632	8 842	8 842	8 842	8 842
GWHD(42)ND6MO	9K+12K+12K+12K+18K	6 000	8 000	8 000	8 000	12 000	6 000	8 000	8 000	8 000	12 000
GWHD(42)ND6MO	12K+12K+12K+12K+12K	8 400	8 400	8 400	8 400	8 400	8 400	8 400	8 400	8 400	8 400

Outdoor Unit & Possible Indoor Unit Combinations with AHRI Certified Performance

*You may substitute the 9K unit with a 5K or 7K High Wall unit, find complete capacity information in the extended ratings chart.

Specifications, information, and availability are subject to change without notice. The details provided in this brochure are accurate as of the time of printing; please contact us or visit our website to confirm the most current information

Project:	Approval Information
Consultant Engineer:	
Electrical Contractor:	
Distributor:	
Date:	
Contact:	
Comments:	